Product code: SYSPM10BL
EAN: 5902539825190

OMNIRES

PARMA | shower system for concealed installation

Finish: matt black (BLM)

The OMNIRES PARMA collection stands out with its minimalist, elegant design. A well-balanced form with rounded edges proves light and subtle. Well thought-out solutions give the collection a timeless character.

Matt black is an expressive finishing with a velvety to the touch surface.





Design: Janusz Langner, OMNIRES

Certificates: Polish Declaration of Performance (B marking)

Technologies

The mixer is equipped with the highest quality ceramic cartridge which ensures smooth and precise water flow control whilst guaranteeing long term product performance.

The shower head is made using the ANTI-SCALE technology. It incorporates a silicone insert that prevents internal water stagnation. Occasional tilting of the shower head, so that any stagnant water could flow out through the nozzles, guarantees long term product performance.

The mixer and the shower head are made of high quality A-grade brass.

Thanks to the AIR WATER technology, the water is soft and pleasant to the touch, enhancing the overall showring experience.

The EASY CLEAN nozzles allow the user to easily remove any limescale from the shower head by simply wiping their silicone surface.

Flow characteristics

- water flow at 3 bar: 16 l/min
- hot water supply: max. 90 °C

Specification

- shower/bath mixer for concealed installation (PM7435BL)
- brass shower head (WG220-OBL), dimensions: 20 x 20 cm
- brass shower arm (RA15BL)
- hand shower (JIMJIM-RBL), 3-function, streams: rain, whip, mixed
- PVC-coated flexible shower hose (028BL), length: 150 cm
- brass shower elbow with a hand shower bracket (8815BL)

Product care

HOW TO TAKE CARE OF BATHROOM AND KITCHEN FITTINGS?

You should clean your bathroom and kitchen fittings regularly, preferably after each use, so as to prevent the build-up of hard-to-remove dirt. For daily maintenance of external surfaces, use a soft cloth (for example, a microfibre cloth) and a solution of water with a mild cleaning agent with a natural composition. Hard-to-reach recesses and milled details can be gently cleaned with a soft brush. Then rinse the product thoroughly with clean water and wipe it dry. It is not recommended to use rough or abrasive materials and corrosive or bleaching substances to prevent damaging the surface of the product.

For more stubborn dirt, use a 10% citric acid solution with water. Apply this solution directly to the product or cover the product with a cloth soaked in the solution. After 10 minutes, rinse the product thoroughly with clean water and wipe it dry. If necessary, the process can be repeated.

HOW TO TAKE CARE OF A SHOWER HEAD?

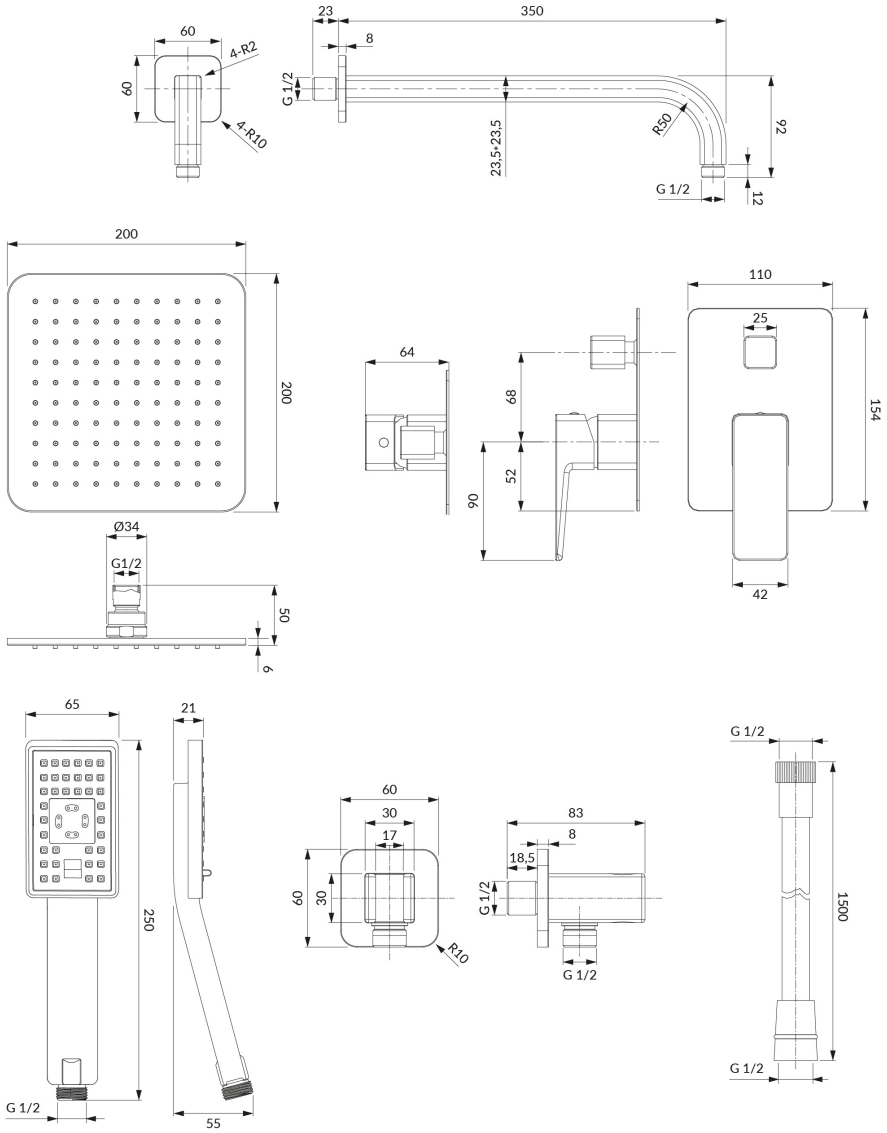
Remember to regularly wipe the silicone nozzles with your hand to remove any limescale deposits that might be forming on their surface. Avoid using harsh cleaning agents that may damage the nozzles and the surface of the shower head.

The shower head should be angled after each use to allow the remaining water to flow out. This is the easiest yet necessary way to reduce the build-up of limescale from the water inside the shower head. Tilting the shower head additionally reduces the risk of the product becoming prone to leaking, allowing the product to serve its purpose reliably for an extended time.

WHAT IS THE BEST WAY TO CARE FOR A HAND SHOWER ?

Remember to regularly wipe the silicone nozzles with your hand to remove any limescale deposits that might be forming on their surface. A toothpick or toothbrush can also be used to clean the spaces in between if there is a considerable build-up of limescale.

For more stubborn dirt, it is recommended to immerse the hand shower in a 10% citric acid solution with water for about 10 minutes to soften the limescale and then wipe across the nozzles with a soft brush. It is not recommended to use rough or abrasive materials and corrosive or bleaching substances to prevent damaging the surface of the product. From time to time, it is recommended to unscrew the hand shower and flush it from the inside to remove any dirt preventing the flow of water.


60
4-R2
60
4-R10
23
350
8
G 1/2
23,5-23,5
R50
92
G 1/2
12
200
200
Ø34
G1/2
50
6
64
110
25
68
52
90
154
42
65
21
250
G 1/2
55
60
30
17
60
30
R10
83
8
18,5
G 1/2
G 1/2
G 1/2
1500