Product code: AM5238-6ORB
EAN: 5902539811520

OMNIRES

ARMANCE | thermostatic 3-way shower/bath mixer for concealed installation


Finish: brushed antique copper (ORB)

The OMNIRES ARMANCE collection features modern form with creative references to traditional style. It stands out thanks to its perfect design, decorative details and its romantic aesthetics.

Made of high grade brass, the mixer is equipped with a superior quality ceramic cartridge.

Antique copper is an expressive finishing in a red-brown shade, with brushed texture and vintage character.

Certificates: Polish Declaration of Performance (B marking), Polish Hygienic Certificate PZH

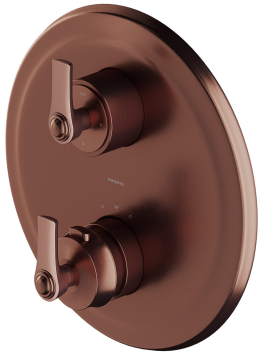

Technologies

The mixer is equipped with the highest quality thermostatic cartridge incorporating a 38°C lock. The cartridge protects against sudden temperature changes and guarantees long term product performance.

The mixer's body, the valve and the rosette are all made of high quality A-grade brass.

Flow characteristics

- water flow at 3 bar: 20 l/min
- hot water supply: max. 90 °C
- working pressure 1-5 bar
- acoustic group: II/II/II

Specification

- rosette dimensions: ø21 cm
- minimum wall depth: 5 cm
- two 1/2" inlets (cold and hot water), three 1/2" outlets for mixed water
- with filters and non-return valves
- hot water lock at 38°C
- built-in parts included

Product care

HOW TO TAKE CARE OF BATHROOM AND KITCHEN FITTINGS?

You should clean your bathroom and kitchen fittings regularly, preferably after each use, so as to prevent the build-up of hard-to-remove dirt. For daily maintenance of external surfaces, use a soft cloth (for example, a microfibre cloth) and a solution of water with a mild cleaning agent with a natural composition. Hard-to-reach recesses and milled details can be gently cleaned with a soft brush.

Then rinse the product thoroughly with clean water and wipe it dry. It is not recommended to use rough or abrasive materials and corrosive or bleaching substances to prevent damaging the surface of the product.

For more stubborn dirt, use a 10% citric acid solution with water. Apply this solution directly to the product or cover the product with a cloth soaked in the solution. After 10 minutes, rinse the product thoroughly with clean water and wipe it dry. If necessary, the process can be repeated.

HOW TO KEEP THERMOSTATIC MIXERS IN OPTIMAL CONDITION?

For the thermostatic mixer to operate correctly, run the mixer once every two weeks, spanning the full temperature range – from very cold water to the maximum hot water setting. Repeat the operation several times.

