

## Y | basin mixer for concealed installation

---

### Finish: copper (CP)


The OMNIRES Y collection thrills with its simple line and an impeccable form which expresses the passion in pursuit for the ideal. The design has been inspired by and based on the shape of a circle. Its timeless and perfectly refined design, created in the spirit of minimalism, offers the maximum of interior design options.

Made of high grade brass, the mixer is equipped with a superior quality ceramic cartridge. Innovative technological solutions reduce water consumption by 50% while offering comfort and ease of use.

Copper is a sophisticated finish with a warm red-brown hue and a perfectly smooth, lustrous surface. The product is coated using advanced PVD technology.

Design: Janusz Langner, OMNIRES Studio

Certificates: Polish Declaration of Performance (B marking), Polish Hygienic Certificate PZH

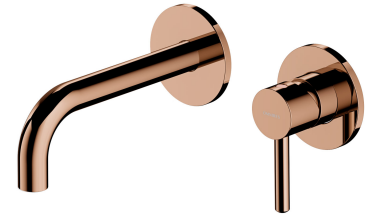

## Technologies

---



The mixer is equipped with the highest quality ceramic cartridge which ensures smooth and precise water flow control whilst guaranteeing long term product performance.



The ECO WATER technology minimizes environmental footprint by reducing the water consumption by approx. 50%, without compromising on the overall product experience.



Thanks to the AIR WATER technology, the water is soft and pleasant to the touch. The stream does not spray and it is quiet and consistent, even if any variations in water pressure occur.



The product is coated using the advanced PVD technology which guarantees highest possible durability, offers exceptional resistance to damage and facilitates cleaning.



The mixer's body, the valve and the rosette are all made of high quality A-grade brass.



Dziesięć lat gwarancji na szczelność korpusu w bateriach łazienkowych.

## Flow characteristics

---

- water flow at 3 bar: 7 l/min
- hot water supply: max. 90 °C
- working pressure 1-5 bar
- noise class: I

## Specification

---

- rosette dimensions:  $\varnothing 7.2$  cm
- spout reach from tiled surface: 16-18.5 cm
- minimum wall depth: 4.5 cm
- ceramic cartridge:  $\varnothing 25$  mm
- built-in parts included

