


## BOX | built-in part for thermostatic 2-way shower/bath mixer

---

### Finish:

The built-in part for thermostatic 2-way shower/bath mixer is equipped with a brass body, high-quality thermostatic cartridge, diverter, and valves with filters. Its advantages include easy installation and a minimum installation depth of just 7 cm. The BOX is designed to be paired with exposed elements Y1236-KROCR, Y1236-ROWM, Y1236-ROCR, Y1236-RONI, Y1236-ROGR, Y1236-ROCPB, Y1236-ROCP, Y1236-ROBSB, Y1236-ROGL, Y1236-ROGLB, Y1236-ROBL, FR7136-ROCR.

Certificates: Polish Hygienic Certificate PZH

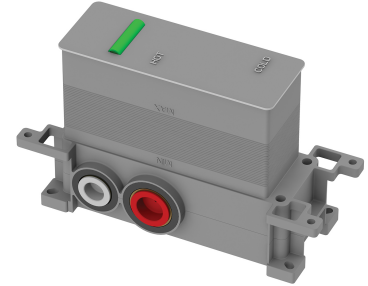

## Technologies

---



The mixer is equipped with the highest quality thermostatic cartridge incorporating a 38°C lock. The cartridge protects against sudden temperature changes and guarantees long term product performance.

## Flow characteristics

---

- working pressure 1-10 bar
- water flow at 3 bar: 22 l/min
- hot water supply: max. 90 °C

## Specification

---

- minimum wall depth: 7 cm
- two 3/4" inlets (hot and cold water)
- two 1/2" mixed water outlets
- with filters and non-return valves
- hot water lock at 38°C
- complementary product to: Y1236-KROCR, Y1236ROWM, Y1236ROCR, Y1236RONI, Y1236ROGR, Y1236ROCPB, Y1236ROCP, Y1236ROBSB, Y1236ROGL, Y1236ROGLB, Y1236ROBL, FR7136ROCR

