Product code: SW9057-FD1BL
EAN: 5902539873894

OMNIRES

SWITCH | kitchen tap with a water filtering system

Finish: matt black (BLM)



The SWITCH kitchen tap combines a minimalist design that draws on well-balanced proportions with practical functionality that provides regular and filtered water. The clearly defined and accurately finished details enable intuitive use by pointing to two separate water streams: regular water near the lever and filtered water at the end of the spout – simply twist the ribbed spout ring to quickly fill a glass with delicious fresh drinking water.

The mixer is available as a set with the Dafi water filtration system consisting of a filter cartridge and a flow meter. The activated carbon and resin technology used in the filter cartridge reduces the content of chlorine and heavy metals while lowering the hardness of water. Changing the filter cartridge is extremely simple, and the need for replacement is indicated by measuring the actual flow of filtered water. The filtering system components can be easily installed in any sink base cabinet.

Made of high grade brass, the mixer is equipped with a superior quality ceramic cartridge offering COLD START technology. This means that the water stream for washing hands and dishes opens with cold water by default, which saves energy and prevents the needless use of hot water. The vertical starting position of the lever allows the mixer to be installed close to the wall without needing to worry about the space required to turn it to open the water source.

Matt black is an expressive finishing with a velvety to the touch surface.

Design: Paulina Shacalis, OMNIRES
Awards: German Design Awards, Archiproducts Design Awards, Must Have
Distinctions: Dobry Wzór

Certificates: Polish Hygienic Certificate PZH

Technologies

The mixer is equipped with the highest quality ceramic cartridge which ensures smooth and precise water flow control whilst guaranteeing long term product performance.

Aerators and shower heads with the AIR WATER technology inject air into the water making it soft and pleasant to the touch. Water stream is quiet and consistent.

Technologia COLD START sprawia, że strumień do mycia rąk i naczyń domyślnie otwierany jest na wodzie zimnej, co pozwala oszczędzać energię i zużycie gorącej wody.

The filtration system purifies the water by lowering the levels of chlorine and heavy metals and reduces the hardness of the water. The filtered water tastes deliciously fresh and is additionally enriched with potassium.

The product is made of high quality A-grade brass.

Flow characteristics

- water flow at 3 bar: 7 l/min
- working pressure 1-5 bar

Specification

- two-way swivel spout with water filtration function
- the set includes: FLOW COMFORT D1 filtering system, filter cartridge, electronic water FLOW METER and water hardness test strip
- ceramic cartridge with COLD START technology
- spout reach: 22.6 cm
- water outflow height: 25.5 cm
- total mixer height: 44.5 cm
- maximum countertop thickness: 3.5 cm

Product care

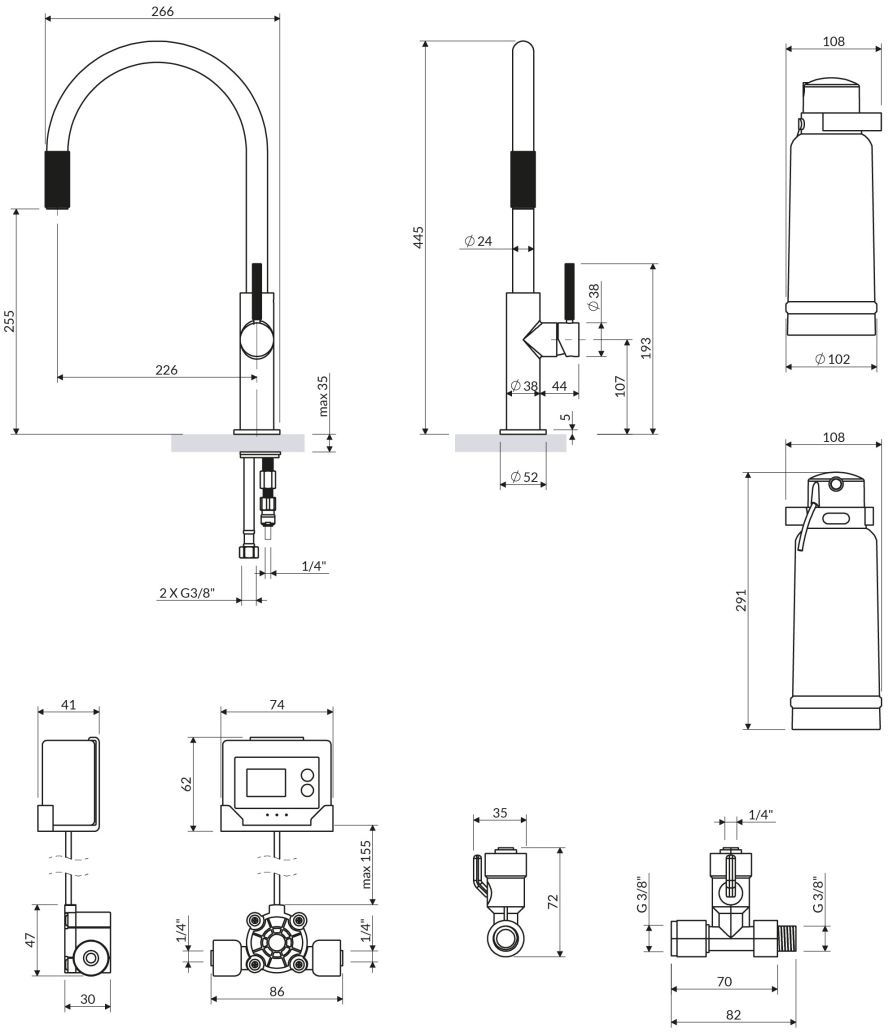
HOW TO TAKE CARE OF BATHROOM AND KITCHEN FITTINGS?

You should clean your bathroom and kitchen fittings regularly, preferably after each use, so as to prevent the build-up of hard-to-remove dirt. For daily maintenance of external surfaces, use a soft cloth (for example, a microfibre cloth) and a solution of water with a mild cleaning agent with a natural composition. Hard-to-reach recesses and milled details can be gently cleaned with a soft brush. Then rinse the product thoroughly with clean water and wipe it dry. It is not recommended to use rough or abrasive materials and corrosive or bleaching substances to prevent damaging the surface of the product.

For more stubborn dirt, use a 10% citric acid solution with water. Apply this solution directly to the product or cover the product with a cloth soaked in the solution. After 10 minutes, rinse the product thoroughly with clean water and wipe it dry. If necessary, the process can be repeated.

WHAT IS THE BEST METHOD FOR CLEANING THE AERATOR?

Remember to regularly control the flow of water through the aerator so as to ensure its problem-free operation and protect it from damage. In the case of small contaminants in the water or “hard” water, remove the aerator once every few weeks and clean it with a brush. In the case of more stubborn dirt, we recommend soaking the aerator for 10 minutes in a 10% citric acid solution with water.


266
255
226
max 35
1/4"
2 X G3/8"
445
∅ 24
∅ 38
193
107
∅ 38
44
5
∅ 52
108
∅ 102
108
291
41
47
30
74
62
max 155
1/4"
1/4"
86
35
72
1/4"
G 3/8"
G 3/8"
70
82