Product code: SYSYS02XCR
EAN: 5902539833386

OMNIRES

# Y | thermostatic bath system for concealed installation

Finish: polished chrome (CR)

The OMNIRES Y collection thrills with its simple line and an impeccable form which expresses the passion in pursuit for the ideal. The design has been inspired by and based on the shape of a circle. Its timeless and perfectly refined design, created in the spirit of minimalism, offers the maximum of interior design options.

Chrome is a versatile finishing in a silvery colour, with the perfectly even and lustrous surface.

Design: Janusz Langner, OMNIRES



## Technologies

The mixer is equipped with the highest quality thermostatic cartridge incorporating a 38°C lock. The cartridge protects against sudden temperature changes and guarantees long term product performance.

The shower head is made using the ANTI-SCALE technology. It incorporates a silicone insert that prevents internal water stagnation. Occasional tilting of the shower head, so that any stagnant water could flow out through the nozzles, guarantees long term product performance.

The product's coating, made using advanced galvanization technology, is durable and easy to clean.

Thanks to the AIR WATER technology, the water is soft and pleasant to the touch, enhancing the overall showring experience.

The EASY CLEAN nozzles allow the user to easily remove any limescale from the shower head and the hand shower by simply wiping their silicone surface.

The mixer's body, the valve and the rosette are all made of high quality A-grade brass.

## Flow characteristics

- hot water supply: max. 90 °C
- working pressure 1-5 bar

## Specification

- exposed element for thermostatic 3-way shower/bath mixer for concealed installation (Y1238-KROCR)
- built-in part for thermostatic 3-way shower/bath mixer (BOXTE3F)
- wall-mounted bath spout (WDYCR), spout reach: 21 cm
- shower head (WGR125CR), dimensions: ø25 cm
- brass shower arm (RA01K-XCR)
- hand shower (YOSEMITE-RCR) 5-function, streams: massage, mist, aerated rain, aerated massage, aerated mist
- PVC-coated flexible shower hose (SILVER-X175SL), length: 175 cm
- brass shower elbow with a hand shower bracket (8873-KCR)

## Product care

### HOW TO TAKE CARE OF BATHROOM AND KITCHEN FITTINGS?

You should clean your bathroom and kitchen fittings regularly, preferably after each use, so as to prevent the build-up of hard-to-remove dirt. For daily maintenance of external surfaces, use a soft cloth (for example, a microfibre cloth) and a solution of water with a mild cleaning agent with a natural composition. Hard-to-reach recesses and milled details can be gently cleaned with a soft brush. Then rinse the product thoroughly with clean water and wipe it dry. It is not recommended to use rough or abrasive materials and corrosive or bleaching substances to prevent damaging the surface of the product.

For more stubborn dirt, use a 10% citric acid solution with water. Apply this solution directly to the product or cover the product with a cloth soaked in the solution. After 10 minutes, rinse the product thoroughly with clean water and wipe it dry. If necessary, the process can be repeated.

### WHAT IS THE BEST METHOD FOR CLEANING THE AERATOR?

Remember to regularly control the flow of water through the aerator so as to ensure its problem-free operation and protect it from damage. In the case of small contaminants in the water or “hard” water, remove the aerator once every few weeks and clean it with a brush. In the case of more stubborn dirt, we recommend soaking the aerator for 10 minutes in a 10% citric acid solution with water.

### HOW TO KEEP THERMOSTATIC MIXERS IN OPTIMAL CONDITION?

For the thermostatic mixer to operate correctly, run the mixer once every two weeks, spanning the full temperature range – from very cold water to the maximum hot water setting. Repeat the operation several times.

### HOW TO TAKE CARE OF A SHOWER HEAD?

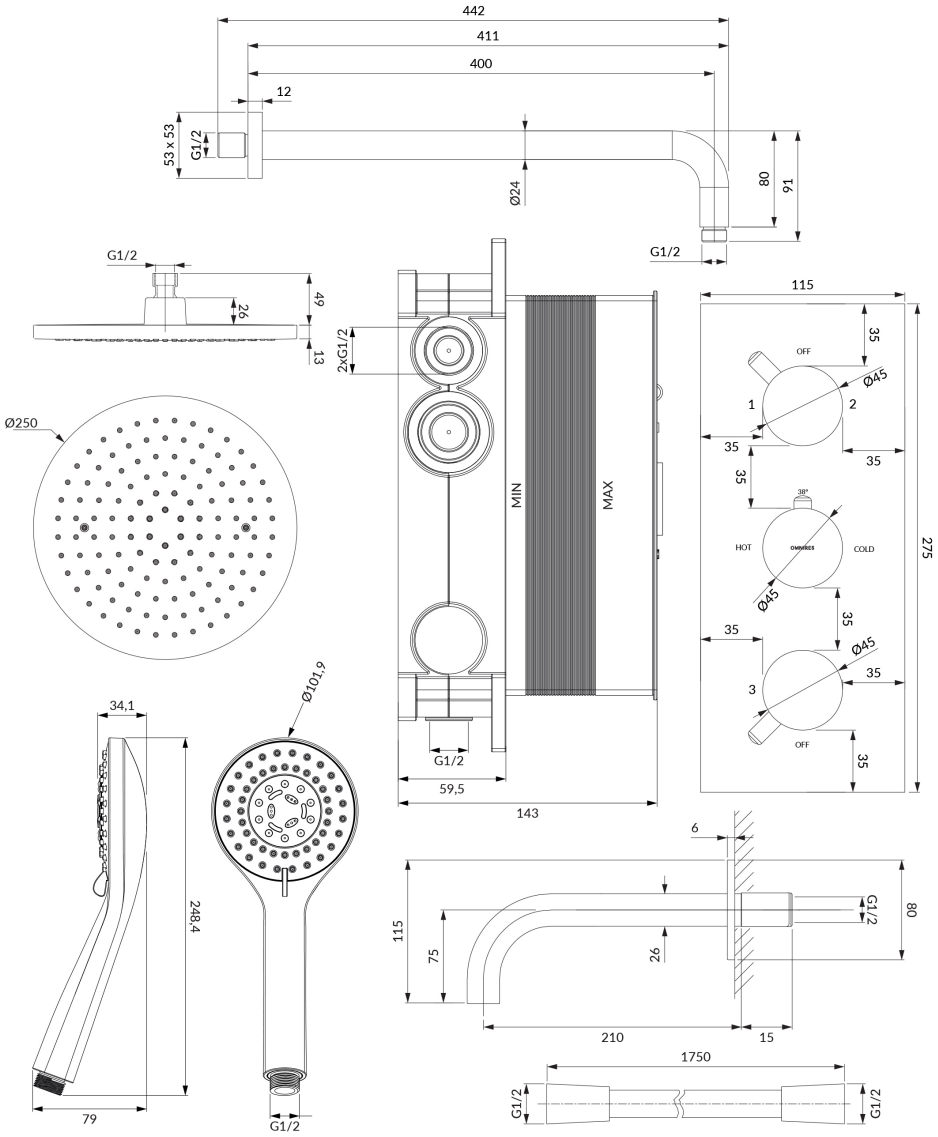
Remember to regularly wipe the silicone nozzles with your hand to remove any limescale deposits that might be forming on their surface. Avoid using harsh cleaning agents that may damage the nozzles and the surface of the shower head.

The shower head should be angled after each use to allow the remaining water to flow out. This is the easiest yet necessary way to reduce the build-up of limescale from the water inside the shower head. Tilting the shower head additionally reduces the risk of the product becoming prone to leaking, allowing the product to serve its purpose reliably for an extended time.

### WHAT IS THE BEST WAY TO CARE FOR A HAND SHOWER ?

Remember to regularly wipe the silicone nozzles with your hand to remove any limescale deposits that might be forming on their surface. A toothpick or toothbrush can also be used to clean the spaces in between if there is a considerable build-up of limescale.

For more stubborn dirt, it is recommended to immerse the hand shower in a 10% citric acid solution with water for about 10 minutes to soften the limescale and then wipe across the nozzles with a soft brush. It is not recommended to use rough or abrasive materials and corrosive or bleaching substances to prevent damaging the surface of the product. From time to time, it is recommended to unscrew the hand shower and flush it from the inside to remove any dirt preventing the flow of water.


442
411
400
12
53 x 53
G1/2
Ø24
80
91
G1/2
G1/2
49
26
13
Ø250
2xG1/2
MIN
MAX
G1/2
59,5
143
115
35
OFF
Ø45
1
2
35
35
35
38°
HOT
COLD
Ø45
35
35
Ø45
3
35
OFF
35
275
34,1
248,4
79
Ø101,9
G1/2
6
115
75
29
80
G1/2
210
15
1750
G1/2
G1/2